



PCT/GB 2003 / 002835  
Rec'd PCT/PTO 03 JAN 2005  
10/519916  
INVESTOR IN PEOPLE

**PRIORITY  
DOCUMENT**  
SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

REC'D 01 AUG 2003

WIPO PCT

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

*He Behan*

Dated 18 July 2003

**BEST AVAILABLE COPY**

04 JUL 2002

The  
Patent  
Office

The Patent Office  
Cardiff Road  
Newport  
Gwent NP9 1RH

# Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

05JUL02 E731156-1 002825  
P01/7700 0.00-0215549.7

1. Your reference **207728/NS/JN**

2. Patent application number  
(The Patent Office will fill in this part) **0215549.7**

3. Full name, address and postcode of the or of each applicant (underline all surnames)  
**Derek John Charles BERNARD  
c/o Transmission Systems Limited  
Chalet Abaco, Green Road  
St. Clement  
Jersey, JE2 6QA, British Channel Islands**

Patents ADP number (if you know it) **963363003**

If the applicant is a corporate body, give the country/state of its incorporation **BRITISH CITIZEN**

4. Title of the invention **Constant Velocity Joints**

5. Name of your agent (if you have one)  
"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)  
**PAGE WHITE & FARRER  
54 DOUGHTY STREET  
LONDON  
WC1N 2LS  
UNITED KINGDOM**

Patents ADP number (if you know it) **1255003**

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number	Country	Priority application number (if you know it)	Date of filing (day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application	Number of earlier application	Date of filing (day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:  
a) any applicant named in part 3 is not an inventor, or  
b) there is an inventor who is not named as an applicant, or  
c) any named applicant is a corporate body  
See note (d)) **YES**

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form.  
Do not count copies of the same document

Continuation sheets of this form

Description	17 ✓
Claim(s)	3 ✓
Abstract	1 ✓
Drawing(s)	12 + 12

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77)

Yes

Request for substantive examination  
Patents Form 10/77)

Any other documents  
(please specify)

I/We request the grant of a patent on the basis of this application.

11.

Signature

Date

4 July 2002

12. Name and daytime telephone number of person to contact in the United Kingdom

NICOLA SHACKLETON

020 7831 7929

Warning

*After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.*

Notes

- a) If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- b) Write your answers in capital letters using black ink or you may type them.
- c) If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- d) If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- e) Once you have filled in the form you must remember to sign and date it.
- f) For details of the fee and ways to pay please contact the Patent Office.

## CONSTANT VELOCITY JOINTS

The present invention relates to constant velocity universal joints for use in any applications in which it is desired to transmit rotational movement between two rotary shafts which are inclined to one another at certain times. Such joints are typically used in the automotive industry, for example, in the drive shafts of front wheel drive vehicles.

The necessary relationships for true constant velocity are first, that the plane of contact between the two shafts must be held constant in space, secondly, that the plane of contact must be perpendicular to the plane determined by the rotational axis of the two shafts and, thirdly, that the plane of contact must define an angle with the axis of each shaft which is equal to one half of the total joint angle.

Reference should now be made to SAE Universal Joint and Drive shaft Manual AE-7, Section 3.2.8 in which the Rzeppa universal joint is discussed. It may also be beneficial to refer to the Appendix H of the same publication.

The typical Rzeppa universal joint depicted in Figure A suffers from the disadvantage that the use of balls limits the degree of contact which is effectively "point" contact. Each of the six balls has one point of contact with the eccentric inner race or groove and one point of contact with the eccentric outer race or groove. Hence, the total area of contact is approximately  $12 \times 1\text{mm}^2$ . In addition, the six balls are in sliding point contact rather than rolling contact so that the balls "skid" in order to move with the cage and satisfy the overriding requirement that the cage must deflect by one half of the joint angle.

The point contact and skidding of the balls results in a high surface pressure and high friction which causes heat generation and ultimately reduces the

life of the joint. The problem of high surface pressure can be overcome in the present invention by increasing the area of contact between the moving parts which transmit torque.

5           Reference should also be made to International patent application WO 00/46522 which discloses various embodiments of a constant velocity joint in which the balls and eccentric outer and inner races of the Rzeppa universal joint have been replaced by hinge elements which can reciprocate within a cage. The central control mechanism described comprises the hinge elements, the cage and  
10   guide elements which together ensure that the hinge axis always lies on the bisecting angle plane (constant velocity plane) between the two shaft axes. Accordingly, it will be appreciated that the movement of the plane of the balls in the Rzeppa universal joint must obey the same rule as the position of the hinge axis in WO 00/46522.

15           There are a number of disadvantages associated with the constant velocity joints disclosed in WO 00/46522. Reference should now be made to Figure B which has been taken from the published document WO 00/46522.

20           Clearly, the large number of parts required increases costs considerably. If possible, the number of parts should be minimised to reduce manufacturing costs and to facilitate assembly and disassembly if the joint fails for any reason.

---

25           It is apparent from WO 00/46522 that most of the torque is transmitted through the central pin 7b. The diameter of the pivot pin is typically 20mm and since there are two shear points, the cross-sectional area transmitting torque is approximately  $2\pi r^2 = 6.28\text{cm}^2$ . This is low relative to the cross-sectional area for transmission of torque in the present invention.

It can also be seen that the torque arm is only half the length of the cylindrical eye of the drive pin 7a (i.e. typically 20mm). Again, this figure is low compared to the torque arm in the present invention.

5           The total bearing surface area is also low. This area is the circumference of pivot pin 7b multiplied by its length of 3cm ( $\pi \times d \times l$ ) i.e. typically 18.85 cm<sup>2</sup>. Again, the bearing surface area is dramatically increased in the present invention for a constant velocity joint with the same overall swing diameter.

10           Preferably, the distance travelled by the reciprocating mass, i.e. the cage should be minimised. This mass multiplied by the distance travelled determines the imbalance load in the joint. In WO 00/46522 the distance travelled is typically 20mm whereas in the present invention this figure can be reduced by approximately two thirds.

15           Clearly, in the present invention, it becomes relatively easy to have deflection angles as high as 60° with minor modifications to the configuration albeit with a somewhat reduced torque capacity for a given swing diameter.

20           Finally, in WO 00/46522 there are only means for preloading the Timken assembly in the claw heads (see Figure 13) but no means for preloading other portions of the joint. Therefore, backlash cannot be eliminated which is obviously disadvantageous.

25           The problems associated with the constant velocity joints described above have been addressed in the present invention to achieve a more efficient, cost effective and long lasting joint, particularly at continuously high deflection angles. Most importantly, the constant velocity joint is approximately statically and dynamically balanced at all times.

According to the present invention, there is provided a constant velocity universal joint comprising two shafts, one shaft being the input and the other shaft being the output, each shaft having a claw located on one end, first and second  
5 hinge elements rotatably mounted between the claws and a cage which can reciprocate with respect to the hinge elements in the direction of the hinge axis (H), the cage containing the hinge elements and allowing them to oscillate relative to each other, the hinge axis (H) and the axis of each shaft intersecting at the geometrical centre (G) of the joint, characterised in that the claws have an eccentric  
10 cam profile which cooperates with the cage to produce the reciprocation of the cage with respect to the hinge elements whilst ensuring that the hinge axis (H) always lies on the bisecting angle plane between the two shaft axes.

Preferably, the cage performs two functions, the first being to hold the two  
15 hinge elements together to form the hinge and the second being to provide two face cams which react with the cam profile on the claws.

Preferably, the claws are mounted for rotation on the hinge elements about  
an axis (V) which passes through the geometrical centre (G) of the joint.  
20

Preferably, the eccentric cam profile of each claw cooperates with the cage  
to produce reciprocation of the cage with respect to the hinge elements when the  
claws are rotated about the axis (V).

Preferably, the hinge elements each comprise a cross shaft with an  
integral stub axle which sits in a respective claw.  
25

Preferably, each cross shaft is identical in form and has a part cylindrical groove and wherein a pair of centre bearings are seated between the grooves, the cross shafts thereby pivoting on the centre bearings about hinge axis (H).

5            Preferably, each cross shaft is identical in form having a part cylindrical recess at one end and an integral centre bearing at the other end, the cross shafts pivoting with respect to each other about the hinge axis (H).

10           Preferably, the cage comprises two spaced containing rings fixedly connected to each other by projections which form cross beams between the containing rings and which extend parallel to the hinge axis (H).

15           Preferably, the containing rings can be axially preloaded against the cam profiles to reduce backlash.

            Preferably, the motion of the containing rings over the surfaces of the cross shafts takes the form of a cylindrical ellipse thus ensuring lubricant flow motion.

20           Preferably, there is further provided a slipper element which sits between the cooperating surfaces of a claw and the cage to increase the surface area of contact.

25           Preferably, the slipper element can pivot about a point which passes through the centre of the cam profile of the claw.

            Preferably, each claw further comprises a preloading means to reduce backlash.



Preferably, the preloading means is a preloading plate to which the slipper element is pivotally connected.

5 Preferably, the first and second hinge elements are fixedly secured to the preloading plate on a respective claw such that the claws can rotate about the axis (V) with respect to the hinge elements and preloading plates.

10 It is important to note that it is the movement of the eccentric cam profile of the claws against the cage which keeps the hinge axis on the bisecting angle plane between the two shaft axes.

15 It is also important to note that the entire joint rotates as a solid body and torque is transmitted from one shaft, via the claws cage and hinge elements to the other shaft. Since the contacting surfaces within the joint are large, torque is transmitted through a much greater surface area than in the prior art arrangements.

Preferred embodiments of the present invention will now be described, by way of example only, with reference to the accompanying drawings, of which:

20 Figures A and B depict prior art constant velocity universal joints;  
Figure 1 is an exploded schematic view of the main elements of a constant velocity universal joint according to the present invention;

Figure 2 is a view down the axis V of the joint in Figure 1 when the shafts are aligned;

25 Figure 3 is a view down the axis V when the shafts have been articulated by  $22.5^{\circ}$  from the aligned position;

Figure 4 is a central sectional view through Figure 2 in direction X-X when the lower shaft has been articulated by  $45^{\circ}$  from the aligned position;

Figure 5 is a view of just the upper shaft and claw in Figure 2;

Figure 6 is a central sectional view through Figure 5 in direction X-X;

Figure 7 is a view in direction Y in Figure 6;

Figure 8 is a view of just the upper cross shaft in Figure 2;

Figure 9 is a central sectional view through Figure 8 in direction X-X;

5 Figure 10 is a cross-sectional view in direction Y-Y in Figure 8;

Figure 11 is a partial cross-sectional view of one of the centre bearings sitting in a cross-shaft;

Figure 12 is a greatly enlarged view of one of the arcuate slots in the cross shaft in Figure 8;

10 Figure 13 is a side view in direction Z of just the containing rings in Figure 2;

Figure 14 is an end view in direction Z of one of the containing rings in Figure 13;

15 Figure 15 is a view from above in direction Z of the containing ring in Figure 14;

Figure 16 is a view from above of just the slipper in Figure 2;

Figure 17 is a side view in direction Z of the slipper in Figure 16;

Figure 18 is a cross-sectional view in direction X-X of the slipper in Figure 17;

20 Figure 19 shows detail of one of the washers which sits in the connecting cross beams of the containing rings;

Figure 20 shows detail of one of the central bearings which sits in the cross shafts.

25 Reference should now be made to Figure 1 which depicts the main elements of a preferred embodiment of the present invention. The exploded view reveals shafts 1 and 2 each having a claw 3 and 4 located on one end. First and second hinge elements 5 and 6 respectively are rotatably mounted between the claws 3 and 4. A cage comprising containing rings 7 and 8 is provided which can

reciprocate with respect to hinge elements 5 and 6 in the direction of hinge axis H and oscillate about hinge axis H.

5 The hinge axis H and the axis of each shaft 1,2 always intersect at the geometrical centre G of the joint whatever the articulation of the shafts may be (see Figures 3 and 4).

10 The claws 3 and 4 have an eccentric cam profile with the centre of the claw head being at point A and the centre of the cam profile being at point B (see Figure 2). The claws 3 and 4 are mounted for rotation on the hinge elements 5 and 6 about an axis V (through point A) which passes through the geometrical centre G of the joint. It is the offset between point A and point B on each claw 3,4 which produces the eccentric movement required to reciprocate the cage with respect to hinge elements 5,6. The degree of eccentricity can be varied to accommodate any  
15 particular overall design.

In Figure 2 the shafts 1,2 are aligned and the entire joint rotates as a solid body. Torque is transmitted from one shaft, via the claws, cage and hinge elements to the other shaft.

20

In Figure 3, the shafts 1,2 have been articulated about axis V through  $22.5^{\circ}$ . Relative rotational movement will now also occur between each side of the joint. The eccentric cam profile of the claws 3,4 reacting against the cage (comprising containing rings 7,8) forces the cage to reciprocate on the hinge  
25 elements 5 and 6. This reciprocation can be seen by comparing Figures 2 and 3 where the cage has moved from its central position along hinge element 5 in the same direction as the shafts 1 and 2.

The hinge elements 5,6 are shown in detail in Figures 8 to 12. Each hinge element comprises a cross shaft 9a, 9b with an integral stub axle 10a, 10b. Figure 4 is a central sectional view through the joint in Figure 2 with shaft 2 articulated by  $45^{\circ}$ .

5 Referring now to Figures 4,5,6 and 7, the stub axles 10a, 10b sit in cylindrical recesses 38a, 38b in claws 3,4 respectively. The claws 3,4 each comprise a preloading plate 39a, 39b respectively. The preloading plates 39a, 39b are fixedly secured by way of pairs of screws 55a,55b respectively (preferably with vibration proof plastic threaded inserts) to the stub axles 10a and 10b. Claw 3 can rotate  
10 about axis V with respect to the stub axle 10a and its respective preloading plate 39a on a bearing assembly comprising sets of taper roller bearings 40 and 41 located between the stub axle and the inside of the claw head. A similar arrangement is provided on the other side of the joint on claw 4.

15 A set of taper roller bearings 40 sit between inboard inner race 43, which is a unitary construction with the stub axle 10a, and outer race 45, which is a unitary construction with the claw 3.

20 A further set of taper roller bearings 41 sit between outboard inner race 42, which is axially adjustable by the preloading plate 39a and screws 55a to reduce backlash, and outer race 44, which is a unitary construction with the claw 3.

Figures 8, 9 and 10 depict one cross shaft 9a, which is part cylindrical in profile, embracing  $135^{\circ}$  at the geometrical centre G of the joint. Cross shaft 9b is  
25 identical in form also embracing  $135^{\circ}$  at the geometrical centre of the joint, making the total embrace  $270^{\circ}$ . Each cross shaft 9a, 9b has a pair of part cylindrical grooves 11a,11b and 11c,11d respectively. Separating the grooves of each pair is a central platform 12a,12b which is wider than the ends of the cross shaft. This is done so as to increase the cross-sectional area of the cross shafts at the inboard area where the

torque arm is at its shortest and the torsional loads are at their highest. In Figure 8, it is clear that each groove 11a and 11b has a "blind" end 54 which ensures that the centre bearings 13 and 14, which sit with an axial light press fit in the grooves, so that they cannot move axially when the joint is articulated. Preferably, the centre  
5 bearings are manufactured in phosphor bronze to reduce friction. It should be noted that the lubricated contact area of a typical journal bearing is only  $60^\circ$  so the  $135^\circ$  section is ample.

The cross shafts 9a,9b together with the centre bearings 13,14 form a  
10 hinge which can pivot about hinge axis H when the joint is articulated in the manner depicted in Figure 4.

Clearly, the cross shafts 9a,9b could alternatively be manufactured as unitary constructions where each cross shaft 9a is provided with a groove on one end and an integral centre bearing on the other end thus reducing the parts count by two.  
15 In this case, the precision forging of the cross shaft would probably be in high tensile steel.

In Figure 13, details of the containing rings 7 and 8 are visible. The  
20 containing rings 7 and 8 are each provided with projections 15,16 and 17,18 respectively. The projections 15 and 17 cooperate to form cross beam 19, and projections 16 and 18 cooperate to form cross beam 20 (see Figures 2 and 3). The two pairs of projections 15,17 and 16,18 are joined by a classical friction joint. The horizontal surfaces of the steps of the cross beams 19,20 are drawn together by  
25 pairs of retaining screws 25,26 whose axes are in tension. These retaining screws pass through slots 52 in one set of steps of the cross beams and are screwed into threads 53 in the other. By virtue of the slots 52 and the dimensions of the cross beam steps, it is possible using the friction joint to axially preload the containing rings

7,8 by pressing them towards each other and making preloaded contact with the slippers 27,28 (described later) and cam profiles.

5 There are several other known ways of joining the two halves of the cross beams, but given the need for axial adjustment and preload, the classic friction joint is considered to be the simplest.

10 Each containing ring has a circular bore 21,22 through which the hinge elements 5 and 6 pass. Preferably, the bores have phosphor bronze liners to reduce friction. The inner surfaces 23,24 which contact the cam profile of claws 3,4 through the slippers 27,28 are recessed to allow oscillation of the containing rings 7,8 on the surfaces of the cross shafts 9a and 9b.

15 The surface area of the bores of the containing rings is approximately  $71.88\text{cm}^2$  whereas the surface area of the cage in WO 00/46522 is only  $42.72\text{cm}^2$ .

20 The slippers 27,28 are pivotally connected to the preloading plates 39a, 39b at point B which is the centre of the cam profile of the claw. Slipper 27 is shown in detail in Figures 16,17 and 18. This slipper 27 is pivotally connected to preloading plate 39a as shown in Figures 2 and 4, for example. The slipper 27 comprises a cross piece 29 and legs 30 and 31. The cross piece 29 has an arcuate slot 32 for a pivot screw 50 located at point B on preloading plate 39a. The legs 30 and 31 sit between the cam profile of the claw 3 and the recessed surfaces 23 of the containing rings 7,8.

25 The cross beams 19,20 are always in tension when the joint is under load. There is a twisting force from the frictional loads of the slipper 27,28 on the inner surfaces 23,24 of the containing rings 7,8 but these are equal and opposite and cancel each other out.

The containing rings 7,8 must be correctly preloaded against the slippers 27,28 and in turn against the cam profiles of claws 3,4 so as to ensure an equal and opposite load through each leg of a slipper and across the opposing sides of the cam profiles. This ensures that the inboard faces of the containing rings 7,8 apply the torque both horizontally through the cross beams 19,20 and also diagonally to both pairs of cam faces and to the claw head bearings. If this preload is not applied, the bearing loads will not be shared and backlash will occur thus causing the joint to function incorrectly such that true constant velocity will not be available at all times.

The cage which comprises the containing rings performs two functions. First, it holds the two halves of the joint together in the form of a hinge. Secondly, it provides the two face cams which react through the slippers onto the cam profiles provided by the outer surfaces of the claw heads. Similarly, the claw heads perform two functions, the first being to provide the cam profiles and the second being to contain the taper roller bearing assembly locating the stub axles to the cross shafts.

By getting these parts to each perform two distinct and separate functions, the need is eliminated for a dedicated set of components to provide the centring mechanism, thereby significantly reducing the parts count of the joint.

---

The axial radius of arcuate slot 32 conforms to the distance A-B. i.e. the eccentricity of the cam profile. The preloading plates 39a, 39b are preloaded against the stub axles 10a,10b via inner race 42 and screws 55a,55b. The pivot screw 50 must be able to slide within arcuate slot 32 as the slipper 27 slides between the cam profile of the claw 3 and the containing ring 7. When preload has been applied there is clearance 51 between the surface of the preloading plates 39a,39b and the surface of the claws to allow the claws to rotate about axis V.

Each leg 30,31 has a tongue 33,34 respectively. The tongues 33,34 can slide in arcuate slots 35,36 in cross shaft 9a as the joint articulates in the manner shown in Figure 3. The arcuate slots 35,36 prevent tilting of the slipper 27 relative to its axis. Slipper 28 is provided with an identical arrangement of tongues which slide in arcuate slots in cross shaft 9b. The tongues are profiled to conform to the arcuate slots.

The axial length of each arcuate slot is equal to the distance travelled by the containing rings 7,8 plus the thickness of the slipper leg 30,31. The axial radius of the arcuate slot conforms to the distance A-B, i.e. the eccentricity of the cam profile (approximately 10mm in this embodiment). The slippers should preferably be manufactured from a dedicated material having a low coefficient of friction.

Figure 19 simply shows the washer 37 which will sit in projections 15 and 18 on the containing rings 7,8 in order to spread the tensile load under the heads of the screws 25,26 onto the surfaces of the cross beams 19,20.

Figure 20 depicts one of the centre bearings 13 which sits in grooves 11a,11b.

Clearly, the slippers 27,28 require the containing rings 7,8 to be recessed at inner surfaces 23,24 (see Figure 14 indicated by cross-hatching). The recesses ensure that the slippers can slide between the cam profile and the containing rings at all angles of articulation of the joint as the containing rings oscillate about hinge axis H and reciprocate along hinge axis H. The recesses 23 and 24 are symmetrical (although they need not be) in order that the containing rings 7,8 can be manufactured as identical parts.



In addition to improving sliding motion, the slippers 27,28 also improve the area of contact between those elements which transmit torque. Without the slippers there would only be "line" contact where the cam profile of claws 3,4 meets the containing rings 7,8. The slippers improve this contact since the area of contact increases by the width "w" of the legs 30,31 which sit against the recesses 23,24 (see Figure 3, Figure 4 and Figure 18). In addition, the length "l" of the legs 30 and 31 must be taken into account (see Figure 4). Typically, the width "w" will be 20mm and the length "l" 40mm. Therefore, the total area of contact for the two legs of each slipper will be  $\approx 1600\text{mm}^2$  (the total for the 2 claws will then be  $3200\text{mm}^2$ ). This is a considerable improvement over a typical Rzeppa universal joint which has a total area of contact of about  $12\text{mm}^2$ . As a consequence, the surface pressure will be reduced by a factor of approximately 260 which will increase the life of the bearing and reduce friction.

It can also be seen that the torque in the present invention passes through a relatively large cross-sectional area of the joint when compared to the joint depicted in Figure B. In Figure B, all the torque passed through pivot pin 7b which typically has a diameter of 20mm. Hence, since there are two shear points the cross-sectional area through which torque passes is  $2\pi(10)^2 \approx 6.28\text{cm}^2$ .

20

In contrast, the cross-sectional area in the joint according to the present invention through which torque passes is equal to the embrace of the cross shafts 9a,9b (multiplied by two since there are two shear points) multiplied by the area of the cross shafts  $\approx 2 \times \frac{270}{360} \times \pi r^2$  where  $r \approx 26\text{mm}$ . Hence, the cross-sectional area for transmission of torque is  $31.85\text{cm}^2$  which is approximately 5 times greater in the present invention.

25

When compared to the joint in Figure B, the torque arm has also increased considerably. In Figure B, the torque arm is half the length of the element 7a, i.e. approximately 20mm. In the present invention, for a joint of the same overall dimensions, the torque arm is half the length of the shoulder 12a,12b, i.e.  
5 approximately 29mm.

There is also an increase in the bearing surface area. In Figure B, this area is the circumference of the pivot pin 7b multiplied by the length, i.e. approximately  $(\pi \times d \times l) \times cm^2$ , i.e.  $\pi \times 2 \times 3 \approx 18.85 cm^2$ . In the present invention, the  
10 bearing surface area will be  $(\pi \times d \times l) \times \frac{270}{360} \times 2$  since there are two bearing surfaces and the embrace of the cross shafts is only  $270^\circ$  rather than  $360^\circ$ , i.e.  $\pi \times 52 \times 41 \times \frac{270}{360} \times 2 \approx 100 cm^2$ .

A further advantage of the joint of the present invention is that the distance  
15 travelled by the reciprocating mass is greatly reduced when compared to the joint in Figure B. In the present invention, the cage will typically move by 8mm whereas in Figure B the reciprocating mass moves approximately 20mm. Therefore, the imbalance load (mass x distance travelled), which should be minimised, is reduced considerably in the present invention. As a consequence, outboard counterbalance  
20 weights can be reduced in mass due to the reduction in the reciprocating mass.

Finally, it should be noted that the motion of the cage over the surfaces of the cross shafts (i.e. during reciprocation along axis H and oscillation about axis H) takes the form of a continuous cylindrical ellipse thus ensuring excellent lubricant  
25 flow motion compared with ordinary reciprocating motion.

A clear advantage of the present invention over the prior art arrangements is the reduction in the number of parts which is desirable from a manufacturing point of view. Moreover, the parts forming each side of the joint can be identical in form which further reduces manufacturing costs and simplifies assembly.

5

In the preferred embodiment described, the joint is made in two identical halves, thereby reducing the total number of different parts to three.

10 The joint consists of six main components but only three pairs. This means that since these could be high tensile steel precision forgings, only three different sets of dies would be required.

Where separate centre bearings are used, these are identical to each other and can be cut from standard bright drawn bar stock with no machining required.

15 The two pairs of slippers are also identical to each other.

For maximum durability and efficiency, the following surfaces of the joint should be case hardened and ground:

- |    |     |   |
|----|-----|---|
| 20 | (a) | the inner faces of the containing rings                                     |
|    | (b) | the outer surfaces of the claw heads  |
|    | (c) | the bores of the containing rings, if they have no liners                   |
|    | (d) | all the surfaces of the cross shafts  |
|    | (e) | the inner and outer races of the taper roller bearing assemblies            |
| 25 | (f) | the slipper assemblies, in the event that dedicated materials are not used. |

No dedicated plant or machinery is required for the manufacture of the joint. Only conventional precision forging, case hardening, machining and grinding

plant is required, thus keeping the manufacturing plant capital costs to a minimum. This is in contrast to the extensive dedicated plant required for manufacture of the Rzeppa joint.

- 5 Finally, no selective assembly is required.

## CLAIMS:

1. A constant velocity universal joint comprising two shafts, one shaft being the input and the other shaft being the output, each shaft having a claw located on one end, first and second hinge elements rotatably mounted between the claws and a cage which can reciprocate with respect to the hinge elements in the direction of the hinge axis (H), the cage containing the hinge elements and allowing them to oscillate relative to each other, the hinge axis (H) and the axis of each shaft intersecting at the geometrical centre (G) of the joint, characterised in that the claws have an eccentric cam profile which cooperates with the cage to produce the reciprocation of the cage with respect to the hinge elements whilst ensuring that the hinge axis (H) always lies on the bisecting angle plane between the two shaft axes.
2. A joint as claimed in Claim 1, wherein the cage performs two functions, the first being to hold the two hinge elements together to form the hinge and the second being to provide two face cams which react with the cam profile on the claws.
3. A joint as claimed in Claim 1 or Claim 2, wherein the claws are mounted for rotation on the hinge elements about an axis (V) which passes through the geometrical centre (G) of the joint.
4. A joint as claimed in Claim 3, wherein the eccentric cam profile of each claw cooperates with the cage to produce reciprocation of the cage with respect to the hinge elements when the claws are rotated about the axis (V).
5. A joint as claimed in any preceding claim, wherein the hinge elements each comprise a cross shaft with an integral stub axle which sits in a respective claw.

6. A joint as claimed in Claim 5, wherein each cross shaft is identical in form and has a part cylindrical groove and wherein a pair of centre bearings are seated between the grooves, the cross shafts thereby pivoting on the centre bearings  
5 about hinge axis (H).

7. A joint as claimed in Claim 5, wherein each cross shaft is identical in form having a part cylindrical recess at one end and an integral centre bearing at the other end, the cross shafts pivoting with respect to each other about the hinge  
10 axis (H).

8. A joint as claimed in any preceding claim, wherein the cage comprises two spaced containing rings fixedly connected to each other by projections which form cross beams between the containing rings and which extend parallel to  
15 the hinge axis (H).

9. A joint as claimed in Claim 8, wherein the containing rings can be axially preloaded against the cam profiles to reduce backlash.

20 10. A joint as claimed in Claim 8, wherein the motion of the containing rings over the surfaces of the cross shafts takes the form of a cylindrical ellipse thus ensuring lubricant flow motion.

25 11. A joint as claimed in any preceding claim, further comprising a slipper element which sits between the cooperating surfaces of a claw and the cage to increase the surface area of contact.

12. A joint as claimed in Claim 11, wherein the slipper element can pivot about a point which passes through the centre of the cam profile of the claw.

13. A joint as claimed in any preceding claim, wherein each claw further comprises a preloading means to reduce backlash.

5 14. A joint as claimed in Claim 13, as dependent on Claim 11 or Claim 12, wherein the preloading means is a preloading plate to which the slipper element is pivotally connected.

10 15 A joint as claimed in Claim 14, wherein the first and second hinge elements are fixedly secured to the preloading plate on a respective claw such that the claws can rotate about the axis (V) with respect to the hinge elements and preloading plates.

15 16. A constant velocity joint substantially as herein described with reference to Figures 1 to 20.

---

## **ABSTRACT**

### **CONSTANT VELOCITY JOINTS**

5           The present invention relates to a constant velocity universal joint comprising two shafts (1,2) each having a claw (3,4) located on one end. First and second hinge elements (5,6) are rotatably mounted between the claws (3,4). A cage (7,8) is also provided which can reciprocate with respect to the hinge elements (5,6) in the direction of the hinge axis (H).

10

(FIGURE 1)



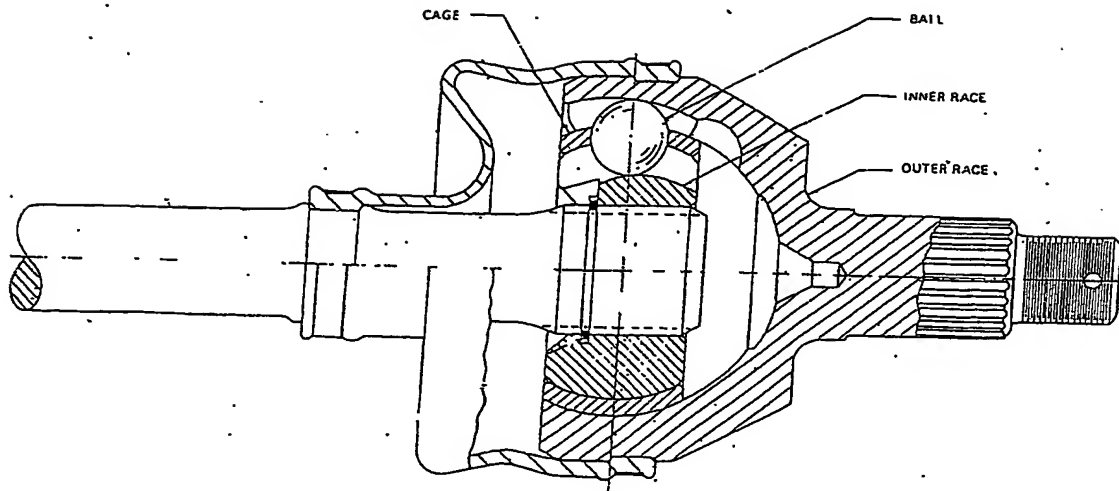


Fig. A (PRIOR ART)

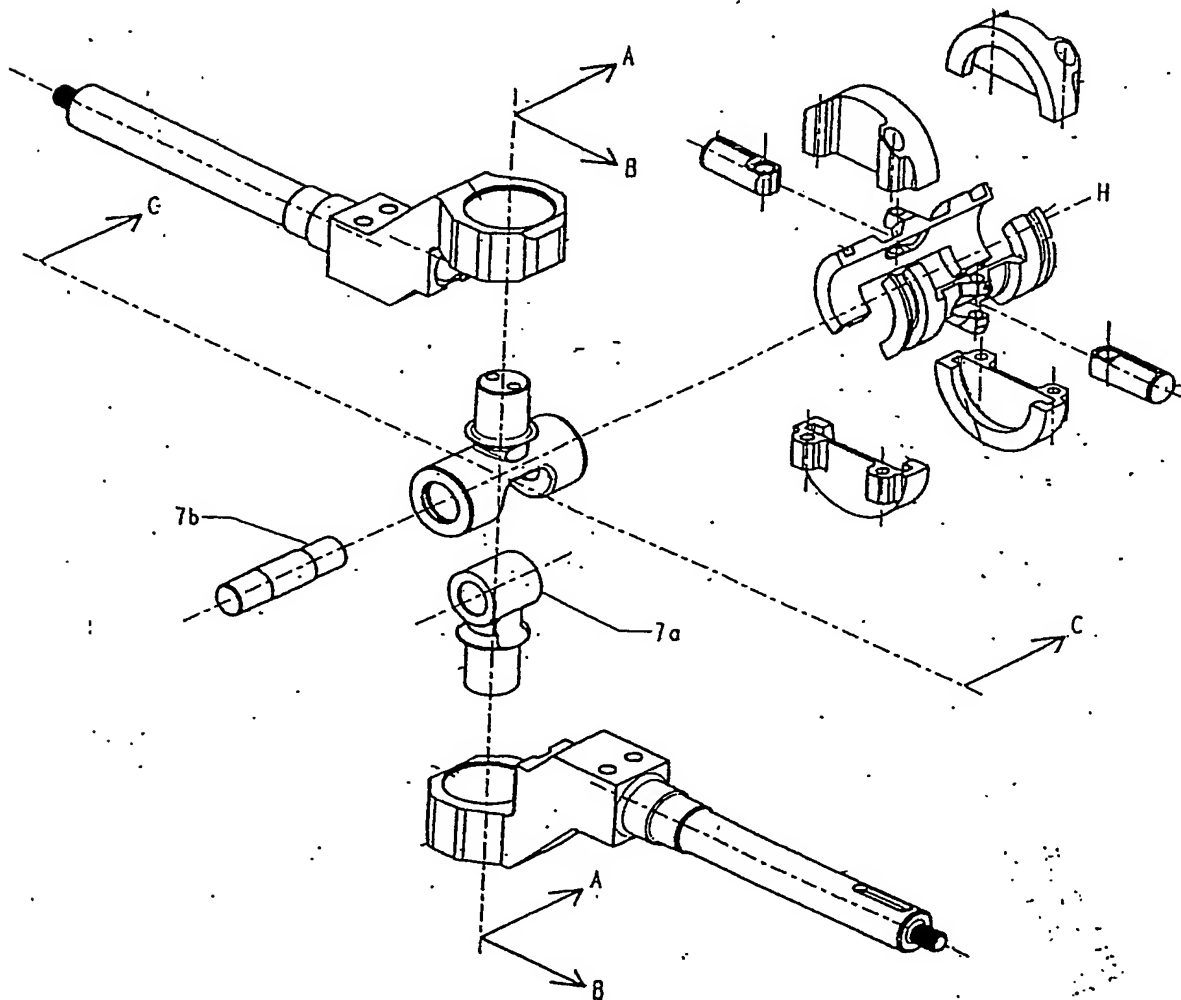


Fig. B (PRIOR ART)

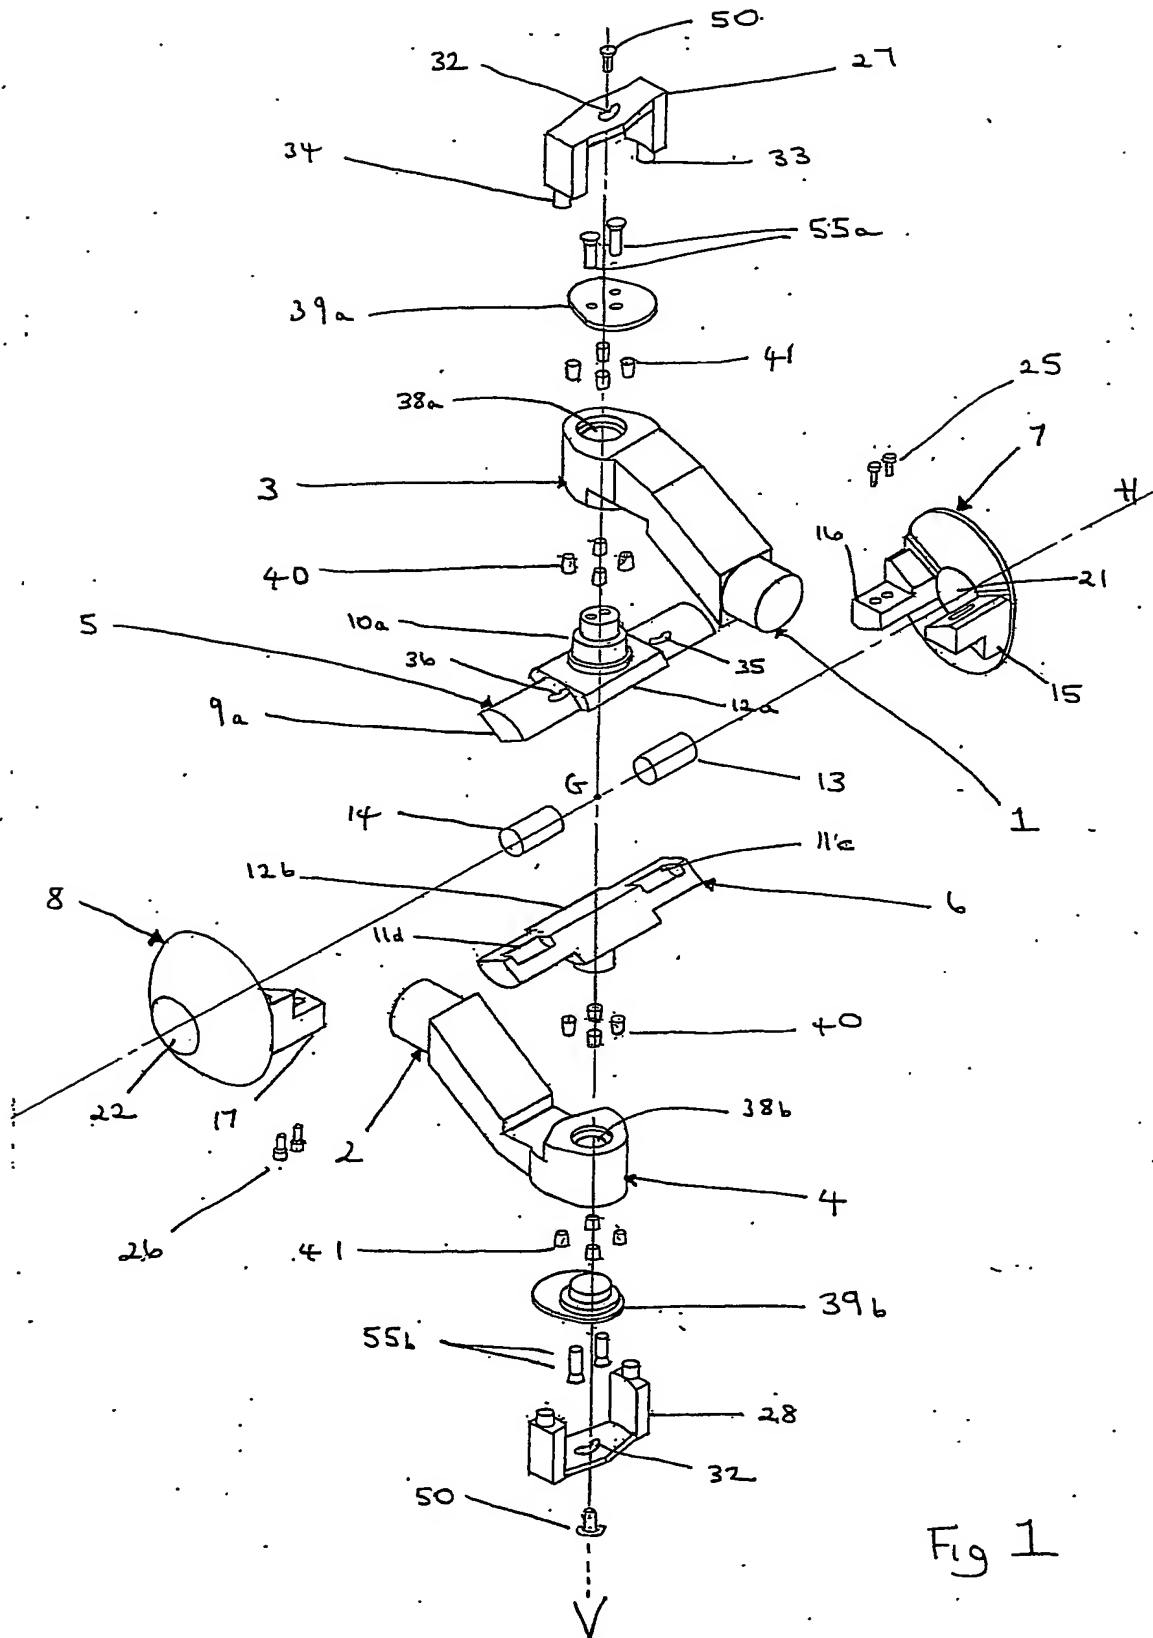
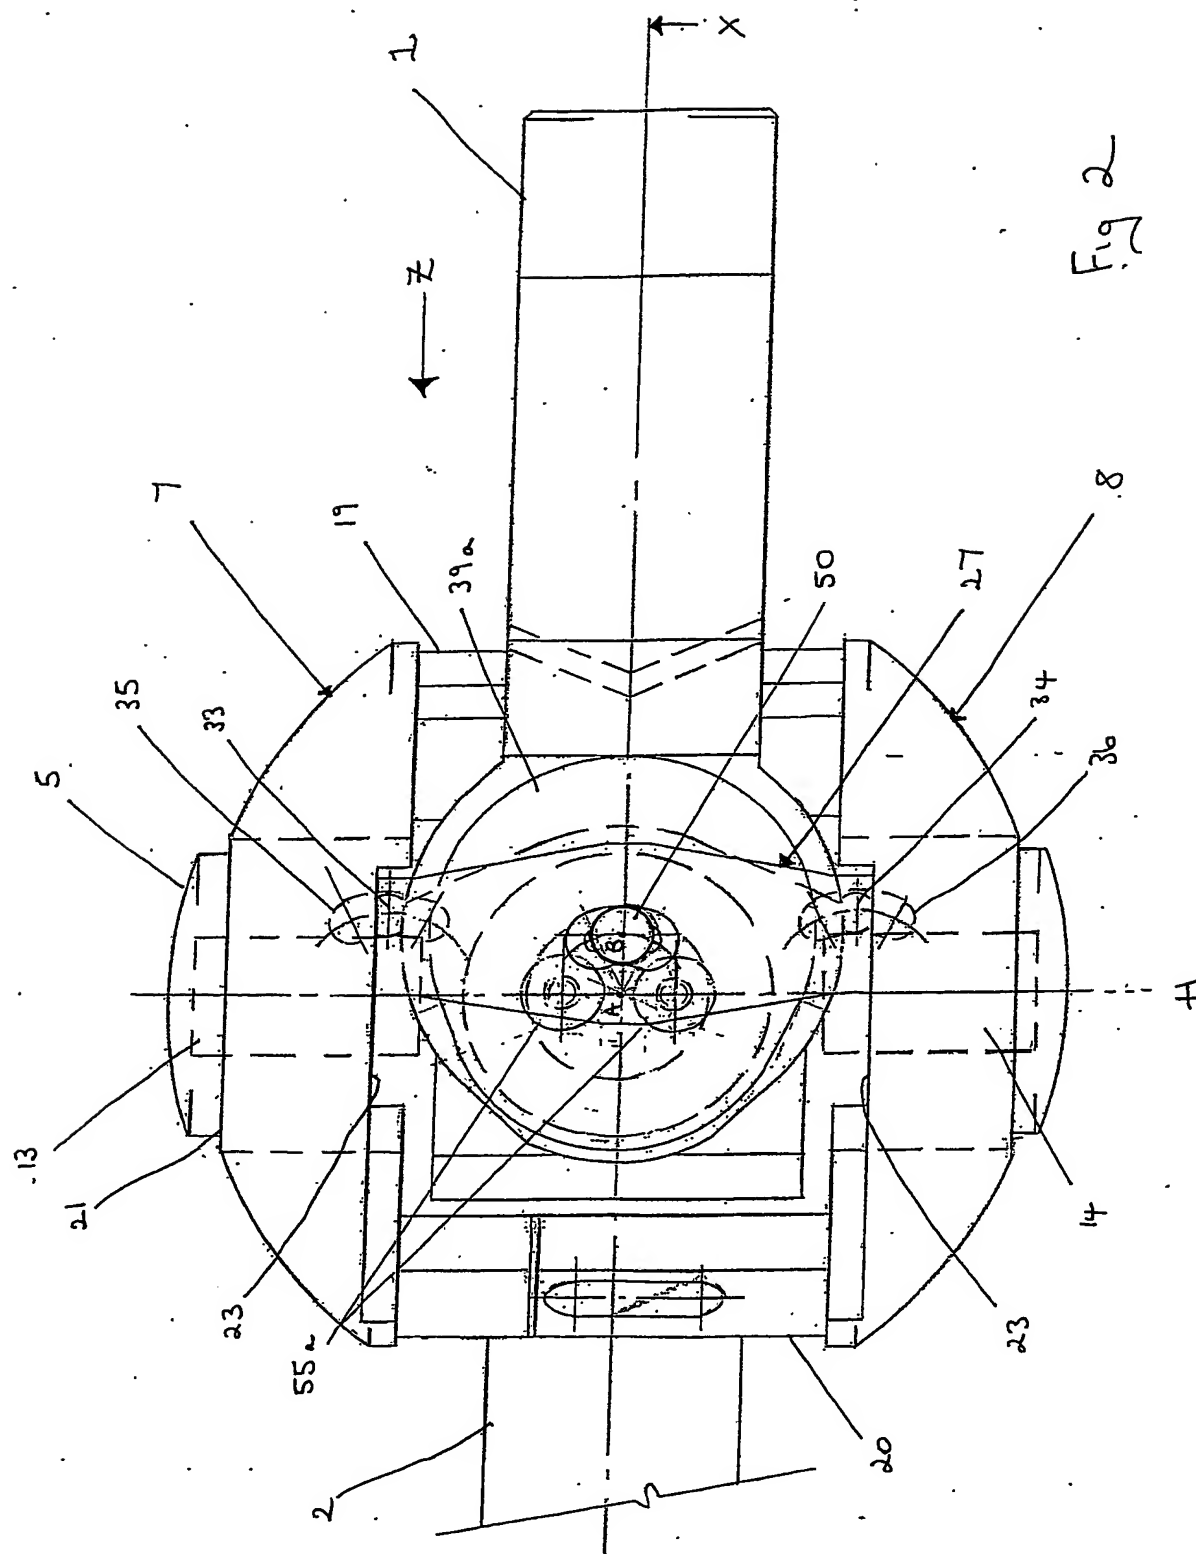
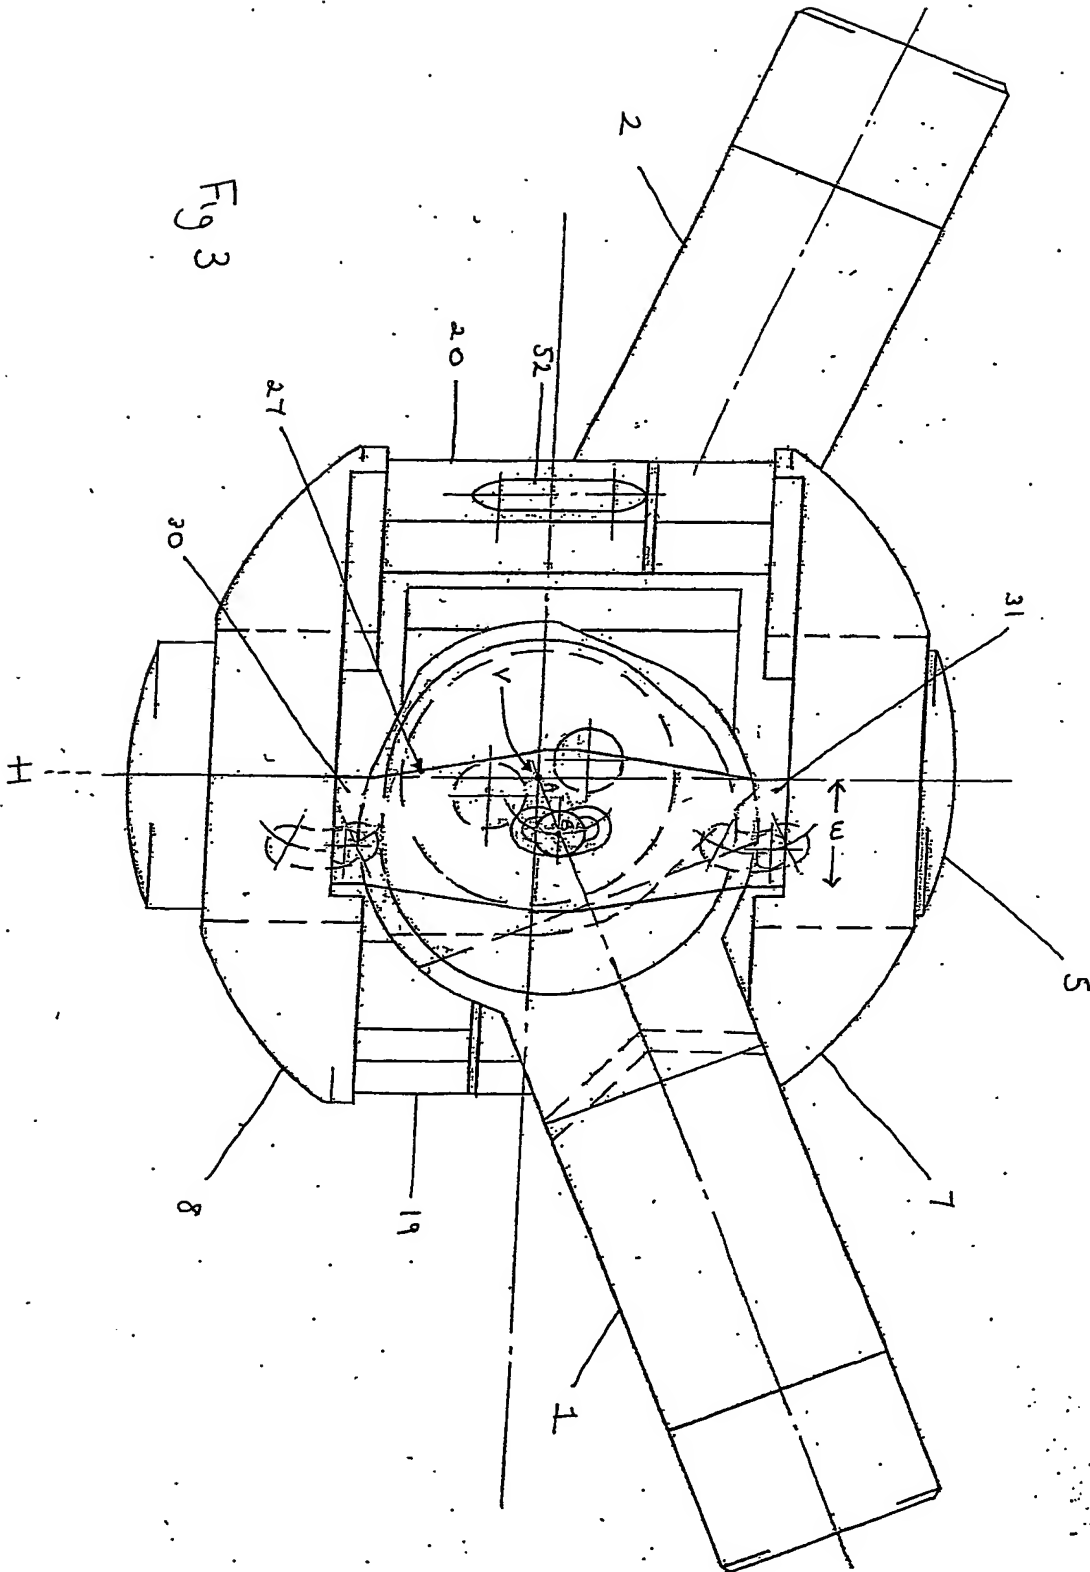


Fig 1





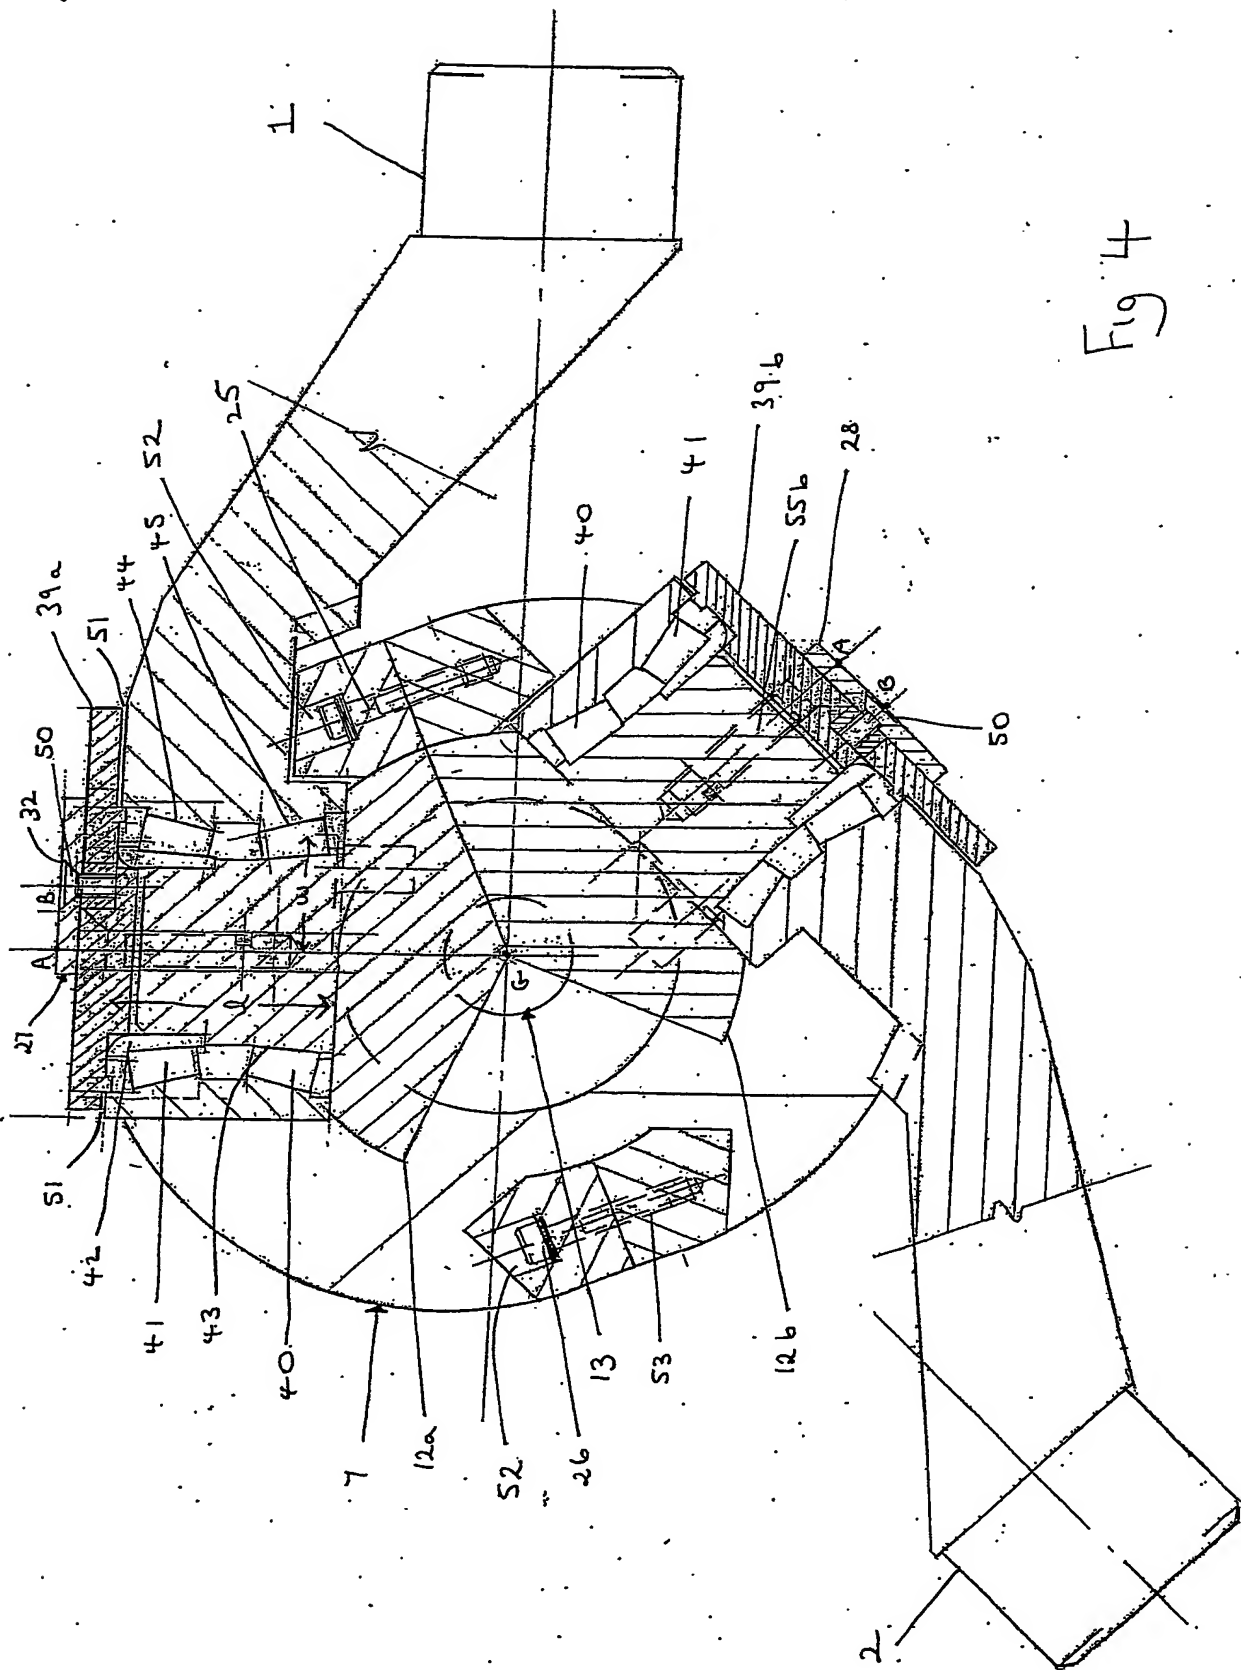


Fig. 4

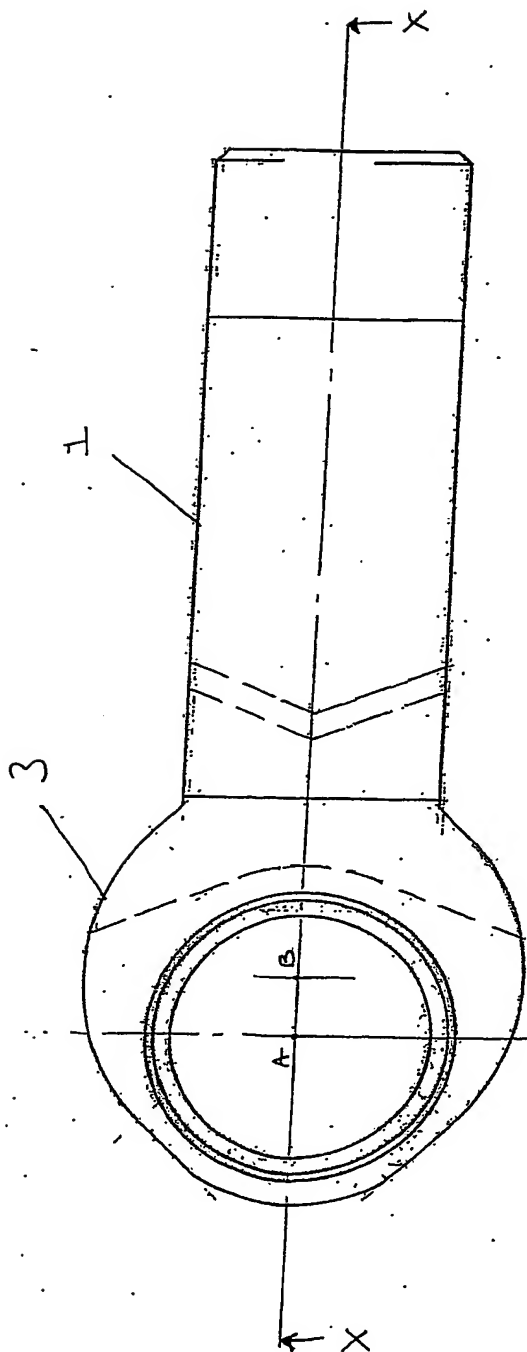


Fig 5

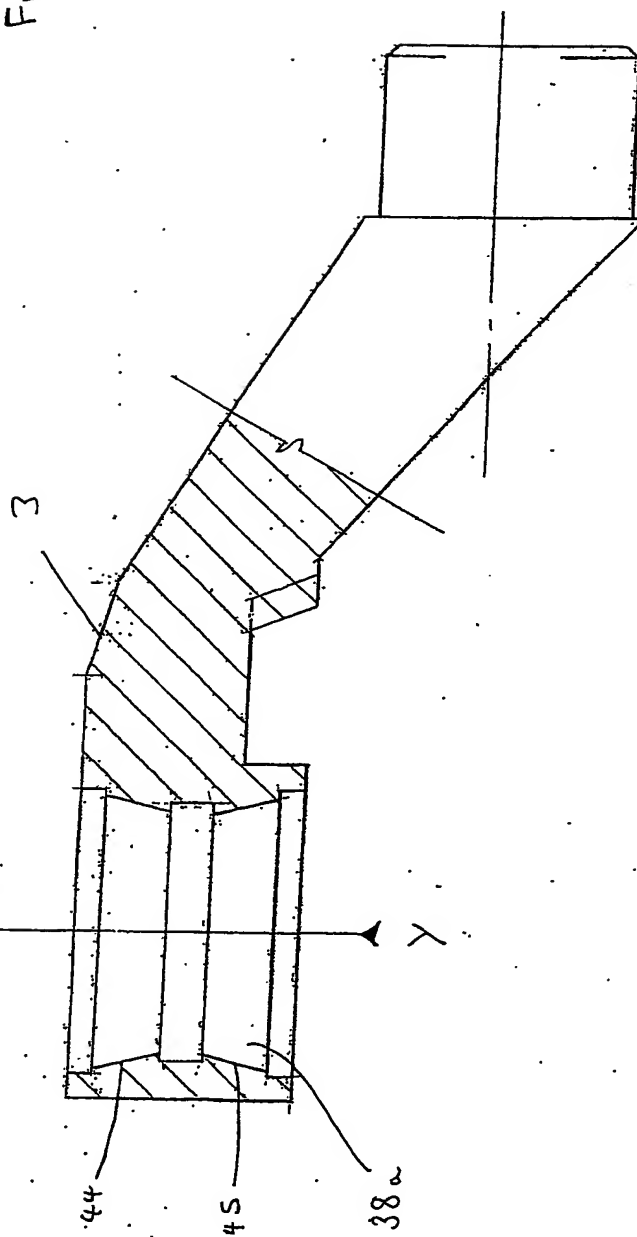


Fig 6

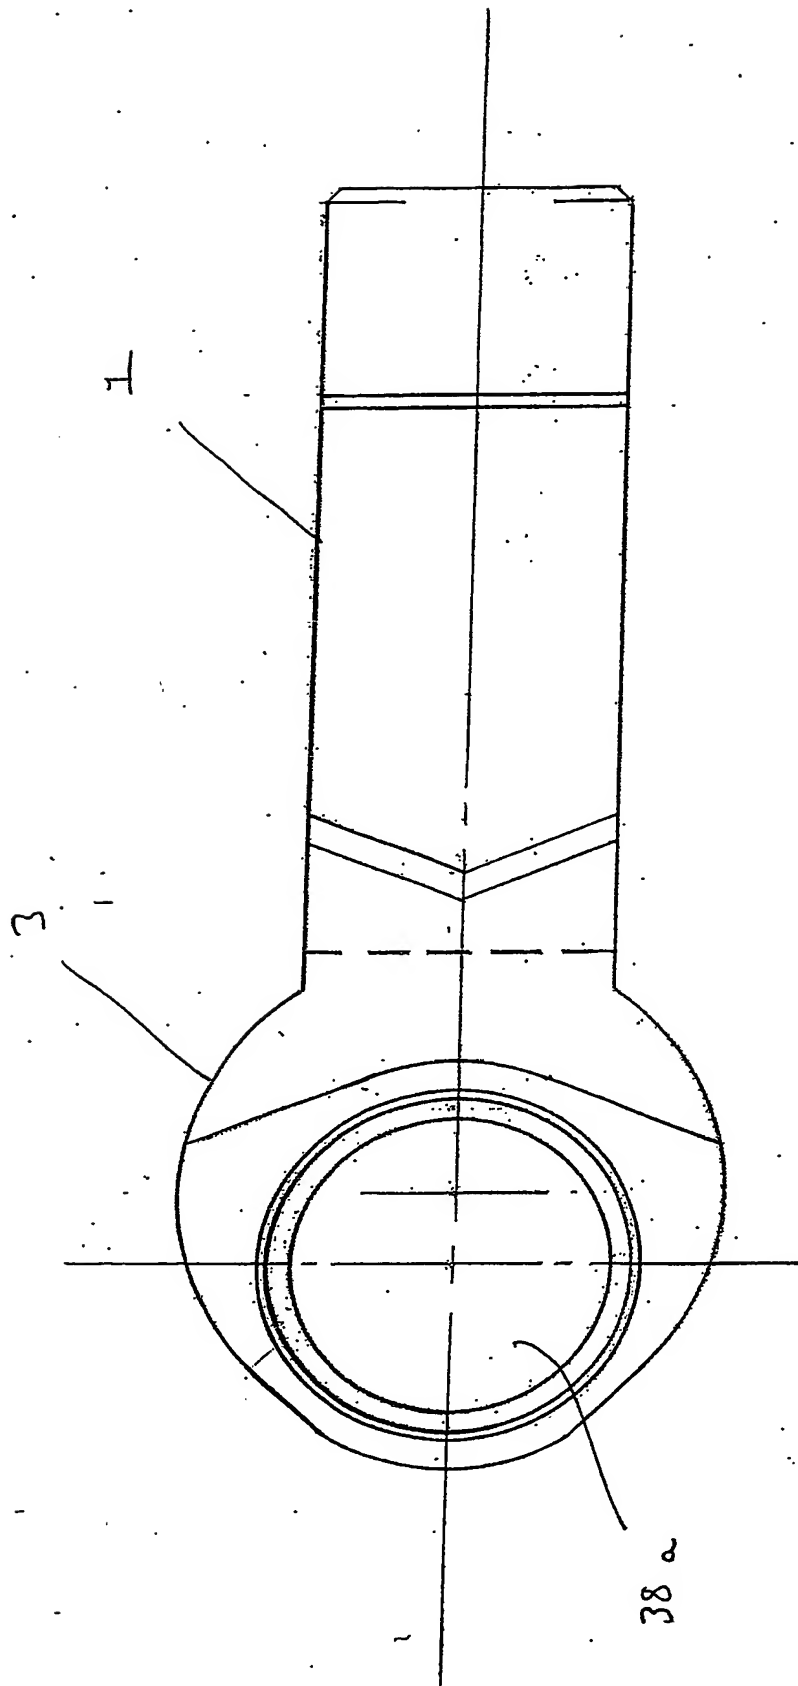
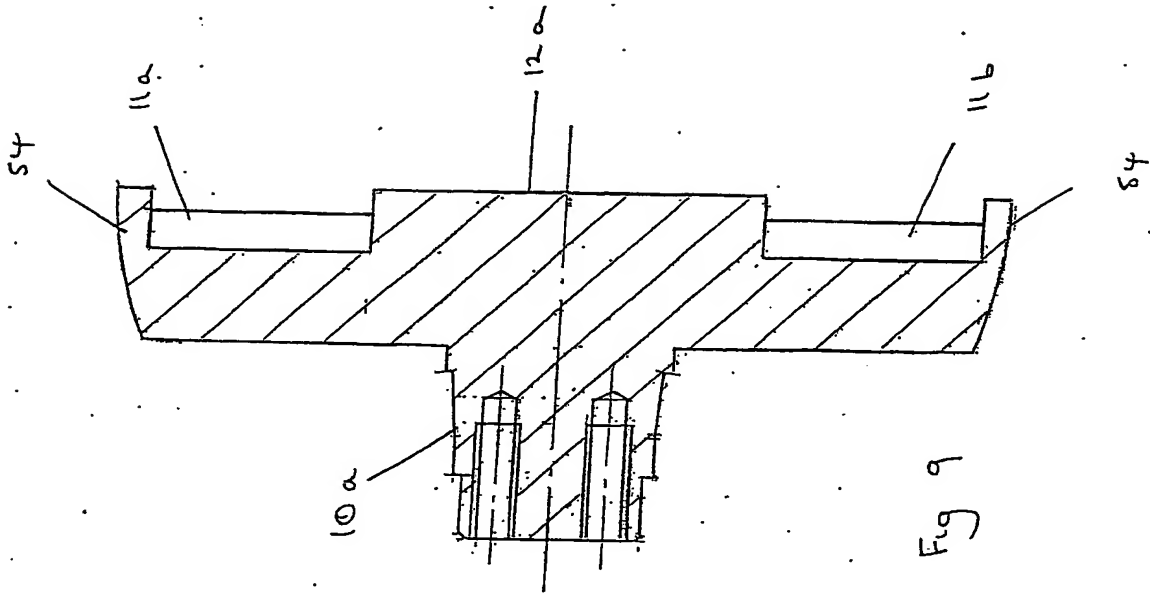
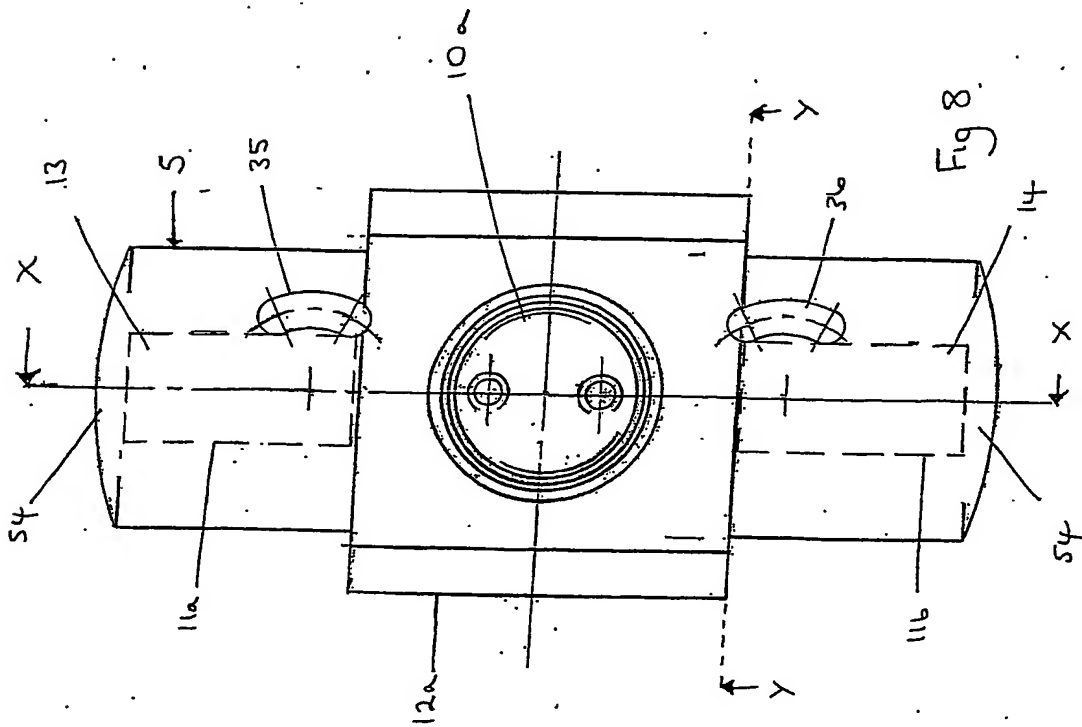


Fig 7





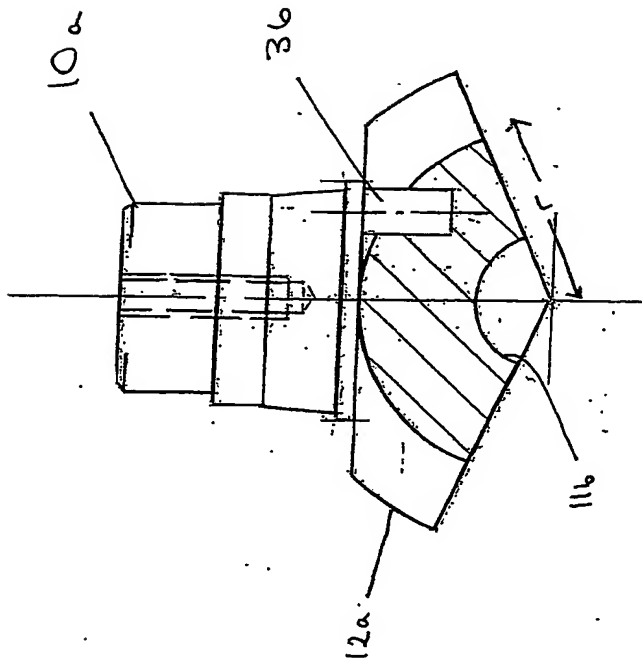


Fig 10

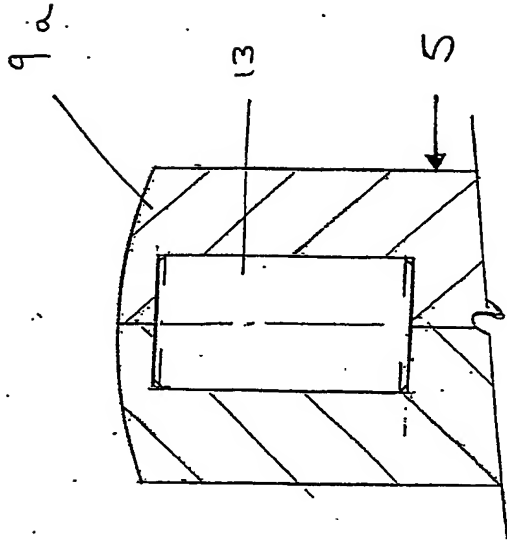


Fig 11

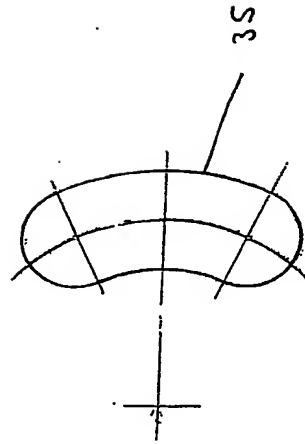


Fig 12








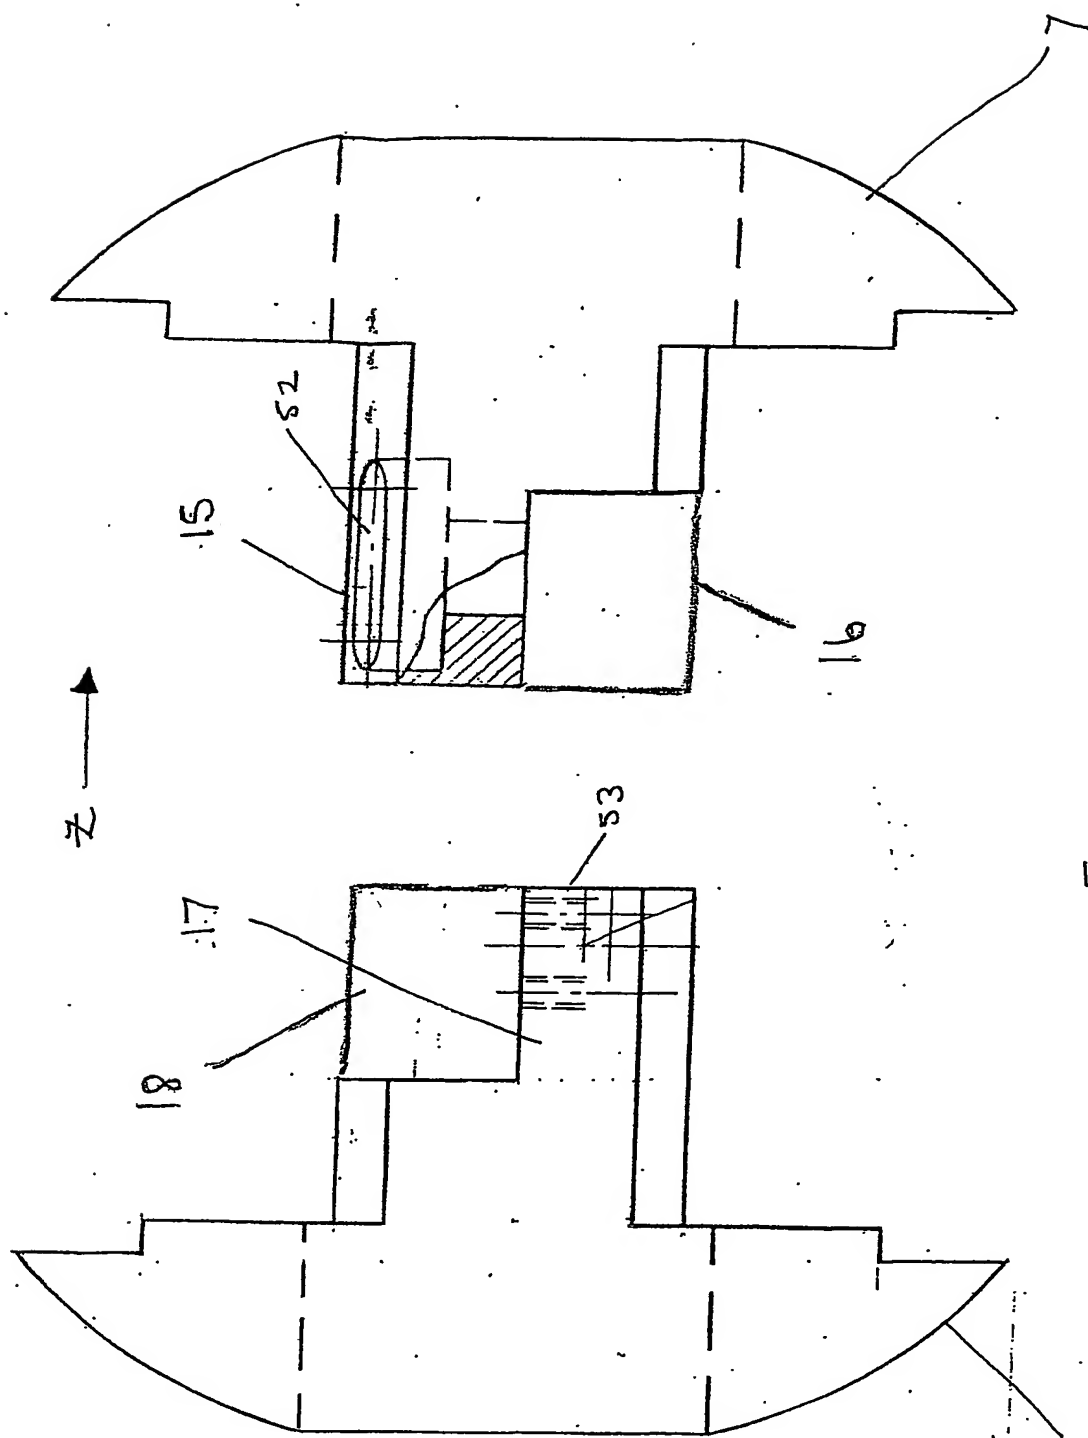


Fig 13

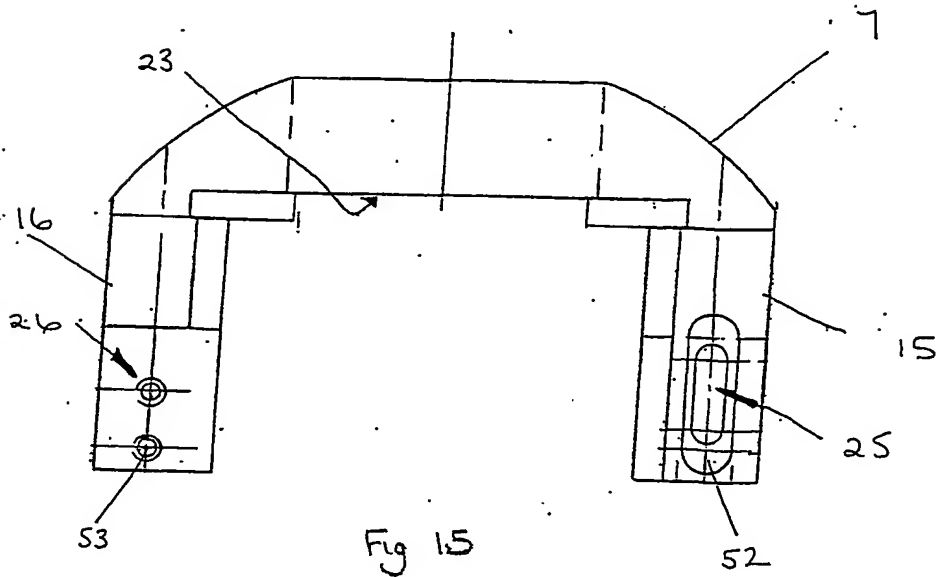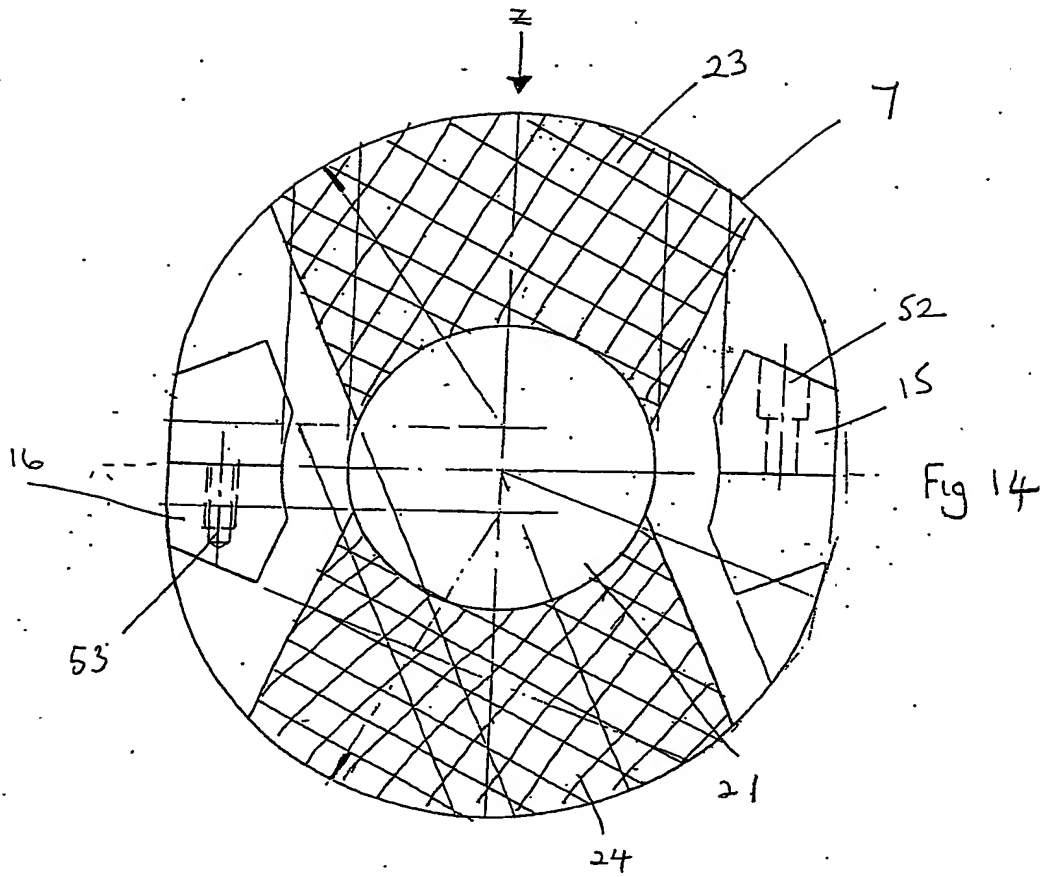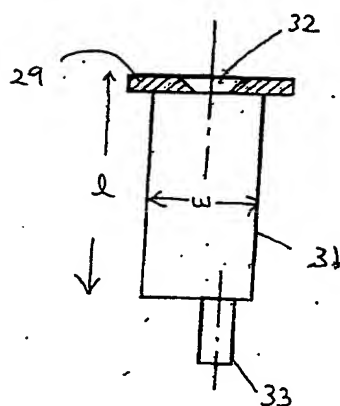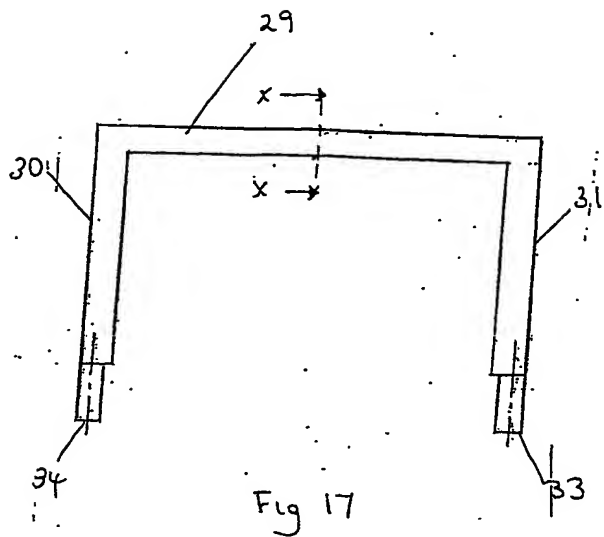

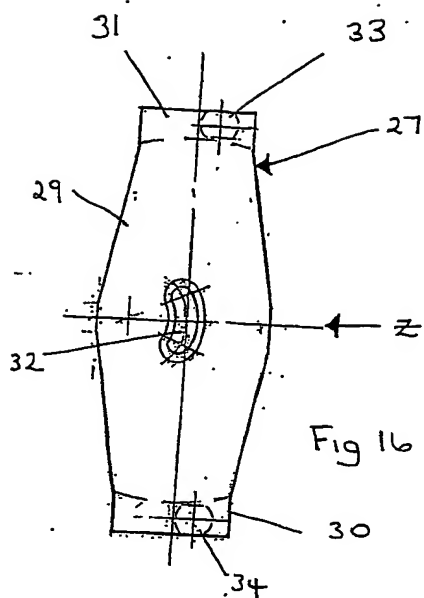

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

☐ BLACK BORDERS

☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES

☐ FADED TEXT OR DRAWING

☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING

☐ SKEWED/SLANTED IMAGES

☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS

☐ GRAY SCALE DOCUMENTS

☒ LINES OR MARKS ON ORIGINAL DOCUMENT

☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY

☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**